

BUY ONLINE

FREE CATALOG

SAVE UP TO 25%



The First in Synthetics®

DATA BULLETIN

## Long Life Synthetic Gear Lube

Specifically Engineered for 500,000-Mile Service Life in Over-the-Road Trucks

AMSOIL Long Life Synthetic Gear Lube is an extended-drain gear lube engineered to last several times longer and protect gears better than conventional gear oils. This exclusive AMSOIL formulation of premium synthetic base oils and high-performance additives resists acid, carbon and varnish formation from oxidative breakdown. Components run cleaner and last longer. AMSOIL Long Life Synthetic Gear Lube is shear-stable and reduces friction. It maintains its viscosity during extended service for maximum wear control and is fuel-efficient. The superior cold-temperature fluidity and high-temperature stability properties of AMSOIL Long Life Synthetic Gear Lube make it excellent for all-season use. AMSOIL Long Life Synthetic Gear Lube helps extend equipment life and reduce maintenance costs.

### APPLICATIONS


AMSOIL Long Life Synthetic Gear Lube, in the correct viscosity grade, is recommended for domestic and foreign applications, including over-the-road trucks, light-, medium- and heavy-duty trucks, off-road equipment, commercial vehicles, motor homes, autos, SUVs, emergency vehicles, buses, delivery/utility vehicles and tractors.

Use AMSOIL Long Life Synthetic Gear Lube in differentials, manual transmissions or other gear applications where one or more of the following standards are specified: API GL-5 & MT-1, MIL-PRF-2105E, Dana\* SHAES\* 234 (Formerly Eaton\* PS-037) for 250,000 miles, Dana SHAES 256 (Formerly Eaton PS-163) for 500,000 miles, Dana SHAES 429A, Mack\* GO-J & GO-J+, Meritor\* 0-76N (75W-90) & 0-80 (80W-140) plus hypoid gear oil specifications from ZF TE-ML 07A and 08 foreign and domestic manufacturers such as GM\*, Ford\* and Daimler\* Chrysler\*. It can also be used in rear axles where API Service GL-4 lubricant is recommended.



75W-90 (FGR)  
& 80W-140 (FGO)

- **High-Load** gear and bearing protection
- **Protection** from rust and corrosion
- **Better** cold-weather shifting
- **Improved** efficiency
- **Improved** seal life

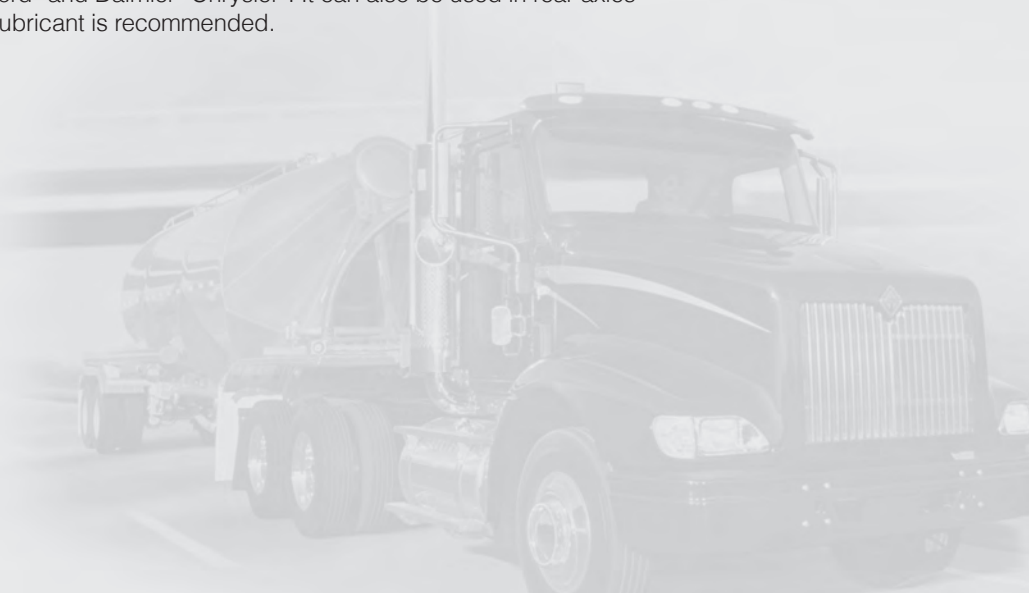

\*All trademarked names and images are the property of their respective owners and may be registered marks in some countries. No affiliation or endorsement claim, express or implied, is made by their use. All products advertised here are developed by AMSOIL for use in the applications shown.

Order by Phone 1-800-956-5695 - Give Operator Reference #5659349

## TYPICAL TECHNICAL PROPERTIES

### AMSOIL Long Life Synthetic Gear Lube 75W-90 & 80W-140

	SAE 75W-90 (FGR)	SAE 80W-140 (FGO)
Kinematic Viscosity @ 100°C, cSt (ASTM D445)	16.6	26.4
Kinematic Viscosity @ 40°C, cSt (ASTM D445)	129.7	257.6
Viscosity Index (ASTM D2270)	137	133
Brookfield Viscosity, cP (ASTM D2983)	98,300 @ -40°C	59,926 @ -26°C
Flash Point, °C (°F) (ASTM D92)	214 (417)	218 (424)
Pour Point, °C (°F) (ASTM D97)	-51 (-60)	-40 (-40)
Copper Strip Corrosion Test (ASTM D130) @ 121°C (250°F) / 3hr	1B	1B
Foam Stability (ASTM D892)	0/0, 0/0, 0/0	0/0, 0/0, 0/0

For product service life in differentials, consult your owner's manual or the original equipment manufacturer (OEM) to establish the application, NORMAL or SEVERE.

Product/Classification	Normal Service	Severe Service
Cars, SUVs & Light Trucks	Drain at 100,000 miles of service or according to the owner's manual, whichever is longer.	Drain at 50,000 miles of service or according to the owner's manual, whichever is longer.
Heavy-Duty Class 8 Line Haul	Follow the OEM drain interval (miles or hours) up to 500,000 miles or five years, whichever comes first.	
Vocational/Delivery	Follow the OEM drain interval (miles or hours) for synthetic oil up to 120,000 miles or three years, whichever comes first.	
Heavy-Duty Off-Road	Follow the OEM drain interval (miles or hours) for synthetic oil up to 100,000 miles or two years, whichever comes first.	

For product service life in non-differential applications, consult owner's manual or the OEM for either normal or severe synthetic oil service intervals. Where service intervals are unavailable, drain at twice the interval for conventional oil.

**Note:** AMSOIL does not support extended drain intervals where water contamination occurs. Check and service the gear oil frequently when water contamination is possible.

Gear oils should be changed more frequently when operating vehicles or equipment in dusty or dirty conditions unless the gear system is properly sealed and equipped with membrane-type breathers.

## COMPATIBILITY

AMSOIL Long Life Synthetic Gear Lube is compatible with other synthetic and conventional gear oils. Mixing AMSOIL gear oils with other oils, however, will shorten the oil's life expectancy and reduce its performance benefits. AMSOIL does not support extended drain intervals where oils have been mixed.

AMSOIL Long Life Synthetic Gear Lube is compatible with most limited-slip differentials. If limited-slip differential chatter occurs, add AMSOIL Slip-Lock® friction modifier additive.

AMSOIL Long Life Synthetic Gear Lube 75W-90 replaces competitors' 75W-90 and 80W-90 viscosity grades.

AMSOIL Long Life Synthetic Gear Lube 80W-140 replaces competitors' 80W-140 and 85W-140 viscosity grades.

## AMSOIL PRODUCT WARRANTY

AMSOIL products are backed by a Limited Liability Warranty. For complete information visit [www.amsoil.com/warranty.aspx](http://www.amsoil.com/warranty.aspx).

## HEALTH AND SAFETY STATEMENT

This product is not expected to cause health concerns when used for the intended applications and according to the recommendations in the Safety Data Sheet (SDS). An SDS is available online at [www.amsoil.com](http://www.amsoil.com) or upon request at (715) 392-7101.

**Keep Out of Reach of Children.** Recycle used oil and bottle.



AMSOIL products and Dealership information are available from your local full-service AMSOIL Dealer.